



Catalogue

2024

Zoe Competition

2

COLORED AND VERSATILE

Totally matching every type of decorative solution thanks to the possible customizations



SHOT TIMER

To accurately and reliably time coffee extraction



LED LIGHTING OF THE WORKING AREA

Allows to effectively work in any light condition




EASY SERVICE

Fast access to the internal parts for quick and easy technical service

LOW SERVICE COST

Designed to decrease the maintenance and inspection costs




ELECTRONIC AUTO-LEVEL

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



ACTIVATED ELECTRONIC PRE-INFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



DOUBLE READING GAUGE

Allows to control at the same time the boiler pressure and the distribution pressure.



EASY SERVICE

Fast access to the internal parts for quick and easy technical service.



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.



LED LIGHTING OF THE WORK AREA

Allows efficient working in any condition of environmental lighting.



SHOT TIMER

To accurately and reliably time coffee extraction.



AUTOSTEAMER

Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



CUP WARMER

Dedicated resistor to keep all the cups at the optimal temperature.



EXTERNAL VOLUMETRIC PUMP



NAKED FILTER HODERS



ENHANCED RESISTANCE


Characteristics

Optional




3


Versions




21" / 530 mm



28" 2/4" / 720 mm



37" 2/4" / 950 mm



14" 1/2" / 368 mm

19" 2/3" / 500 mm

1 group


1 steam tap
1 water tap
1 one-cup filter holder
1 two-cup filter holder

2 group

2 steam taps
1 water tap
1 one-cup filter holder
2 two-cup filter holders

3 group

2 steam taps
1 water tap
1 one-cup filter holder
3 two-cup filter holders



24" 602 mm

5" 1/2" 142 mm

TALL VERSION

2-3 group




Technical data

		1 group	2 group	3 group
voltage	V	220-240 1N / 380-415 3N		
max input boiler/steam boiler's resistor power	kW	2.35 / 1.95	3.35 / 2.7	5.8 / 5.1
			4.3 / 4.0	
			4.8 / 4.5	
steam boiler capacity	lt	5	9	12.5
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	93 / 42	121 / 55	152 / 69
gross weight (with shipping crate)	lb / kg	104 / 47	130 / 59	161 / 73

Colours

	Black	RAL 9005
	White/Black	RAL 9003/9005
	White/Matte black	RAL 9003/9005
	White/Red	RAL 9003/3002

PERSONALISED GRAPHICS

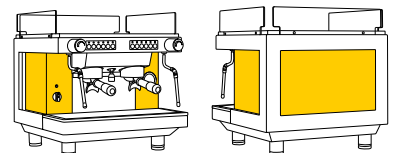

Zoe Competition
Link to the website

Customization of internal panels with graphics and colors (on request).

Zoe



COLORED AND VERSATILE

Totally matching every type of decorative solution thanks to the possible customizations



SED VERSION

Guarantees an electronic dosing system through the button panel



SAP VERSION

Allows the semi-automatic programming of doses



COMPLETE RANGE

Available versions: SED and SAP, 1-2-3 group, Tall and Compact



EASY SERVICE

Fast access to the internal parts for quick and easy technical service

LOW SERVICE COST

Designed to decrease the maintenance and inspection costs



Characteristics



ELECTRONIC AUTO-LEVEL

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



ACTIVATED ELECTRONIC PRE-INFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



DOUBLE READING GAUGE

Allows to control at the same time the boiler pressure and the distribution pressure.



EASY SERVICE

Fast access to the internal parts for quick and easy technical service.



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.



AUTOSTEAMER

Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.



CUP WARMER

Dedicated resistor to keep all the cups at the optimal temperature.



EXTERNAL VOLUMETRIC PUMP



NAKED FILTER HOLDERS




ENHANCED RESISTANCE

Optional




Versions



21" / 530 mm

1 group SED/SAP


1 steam tap
1 water tap
1 one-cup filter holder
1 two-cup filter holder



28" 2/4" / 720 mm

2 group SED/SAP


2 steam taps
1 water tap
1 one-cup filter holder
2 two-cup filter holders



37" 2/4" / 950 mm


3 group SED/SAP

2 steam taps
1 water tap
1 one-cup filter holder
3 two-cup filter holders



14" 1/2" / 368 mm

19" 2/3" / 500 mm




21" 1/3" / 543 mm

20" 3/4" / 530 mm

COMPACT VERSION

2 group

2 steam taps
1 water tap
1 one-cup filter holder
2 two-cup filter holders

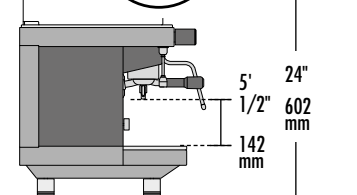

24" / 602 mm

TALL VERSION

2-3 group

SED
SAP


Technical data

		1 group	2 group	3 group	Compact
voltage	V	220-240 1N / 380-415 3N			220-240 1N
max input boiler/steam boiler's resistor power	kW	2.35 / 1.95	3.35 / 2.7	5.8 / 5.1	2.7 / 2.5
			4.3 / 4.0		
			4.8 / 4.5		
steam boiler capacity	lt	5	9	12.5	7
pump power	kW	0.15	0.15	0.15	0.15
net weight	lb / kg	93 / 42	121 / 55	152 / 69	99 / 45
gross weight (with shipping crate)	lb / kg	104 / 47	130 / 59	161 / 73	113 / 51

Colours

	Black	RAL 9005
	White/Black	RAL 9003/9005
	White/Matte black	RAL 9003/9005
	White/Red	RAL 9003/3002

PERSONALISED GRAPHICS

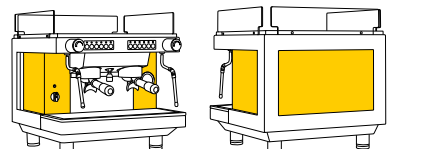

Zoe
Link to the website

Customization of internal panels with graphics and colors (on request).

For more information about our
coffee machines please contact us
export@sanremomachines.com



SANREMO
COFFEE MACHINES

Sanremo Coffee Machines s.r.l.
Via Giacomo Bortolan 52,
31050 Vascon di Carbonera [TV] – ITALY
T +39 0422 448900

www.sanremomachines.com

Sanremo UK, LTD
6/7 Thurloe Pl, South Kensington,
London SW7 2RX – UK
enquiries@sanremouk.com

www.sanremomachines.com

Sanremo Coffee Machines USA, Inc
99 Grand Street, Unit 20, Moonachie,
New Jersey 07074 – USA
T +1 973 907 3013
alessio.t@sanremous.com
www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System
according to UNI EN ISO 9001:2015 standard.